


DWG No. 0090701DV1

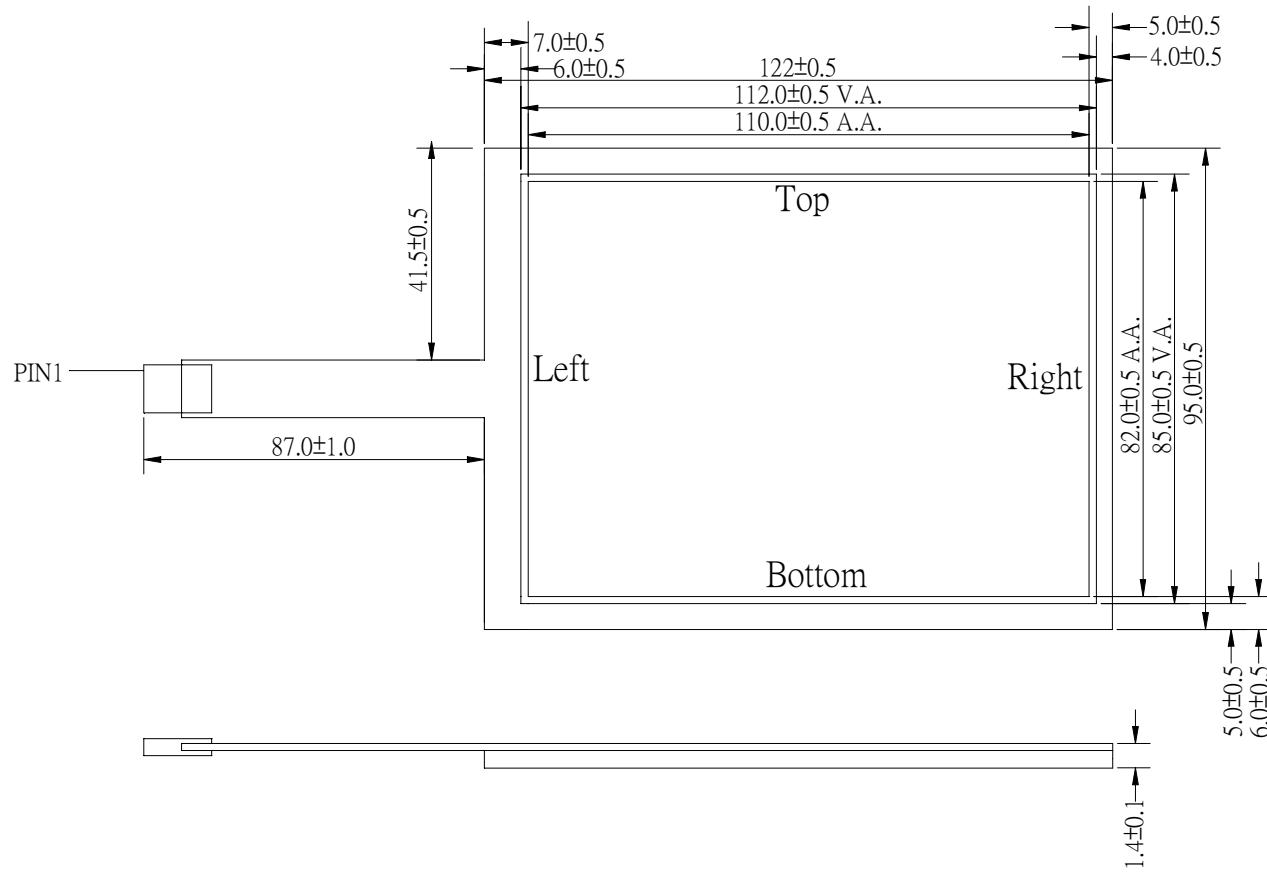

Note:

Pin 1:Right

Pin 2:Top

Pin 3:Left

Pin 4:Bottom

Pin Pitch:2.54mm

Total Thickness:1.4± 0.1 mm

Surface Hardness:3H

Optical Clarity:80%

Operating Temperature:0°C ~ 50°C

Operating Voltage:DC3 ~ 12V

Resistance:200ohm ~ 900ohm

Linearity:< 1.5%

Faceplate Surface:anti-glare coating

Operation Pressure:35g~60g

Storage Temperature:-20°C ~ 70°C

Message Noise: 5 m sec~15 m sec

Operating Current:5mA ~ 25mA

Isolation Resistance:DC25V 20Mohm UP

Endurance Test: Over 1 million strikes

V.A. : VIEW AREA

A.A. : ACTIVE AREA

Model No	SE-AC12295				Date	09 - 07 -2000
				SUPER ELITE TECHNOLOGY CO., LTD	Chang Date	