


DWG No. 2K392401DV1

Unit : mm

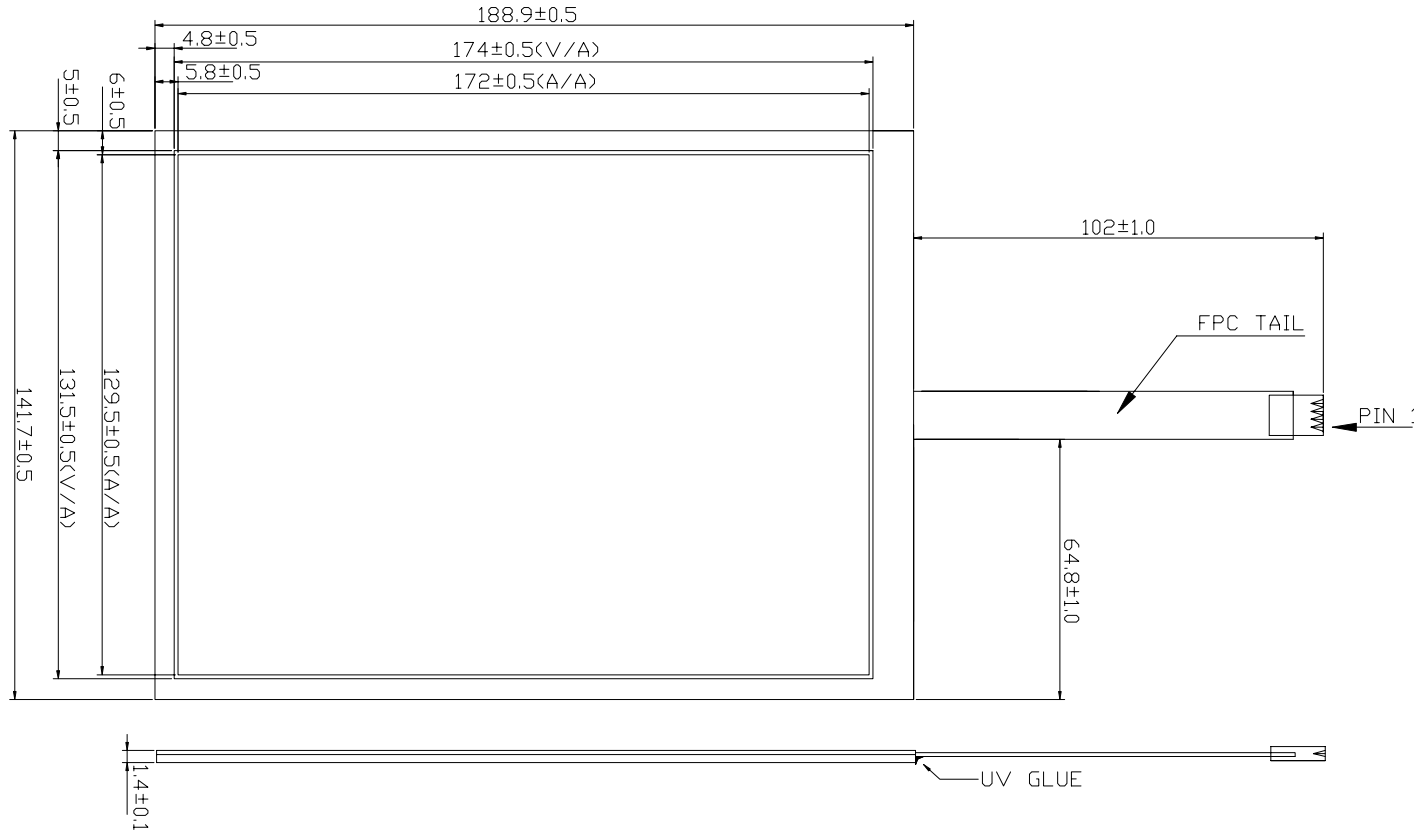

Note :

V/A : VIEW AERA

A/A : ACTIVE AERA

Pin 4 : Right

Pin 3 : Left

Pin 2 : Top

Pin 1 : Bottom

Pin Pitch : 2.54 mm

Total Thickness :  $1.4 \pm 0.1$  mm

Surface Hardness : 3H

Optical Clarity : 80%

Operating Temperature :  $-10^{\circ}\text{C} \sim 60^{\circ}\text{C}$

Endurance Test : Over 1 million strikes

Operating Voltage : DC 5~12 V

Resistance :  $200 \Omega \sim 900 \Omega$

Linearity :  $<1.5\%$

Faceplate Surface : Anti-glare coating

Operation Pressure : 35g~60g

Storage Temperature :  $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$

Isolation Resistance : DC25V 20M $\Omega$

Model

SE-AN0804

Draw

良英股份有限公司

Unit : mm

DATE

09 - 24 - 2003

劉 湘 明  
陳 智 誠