


DWG No. 2K461401DV3

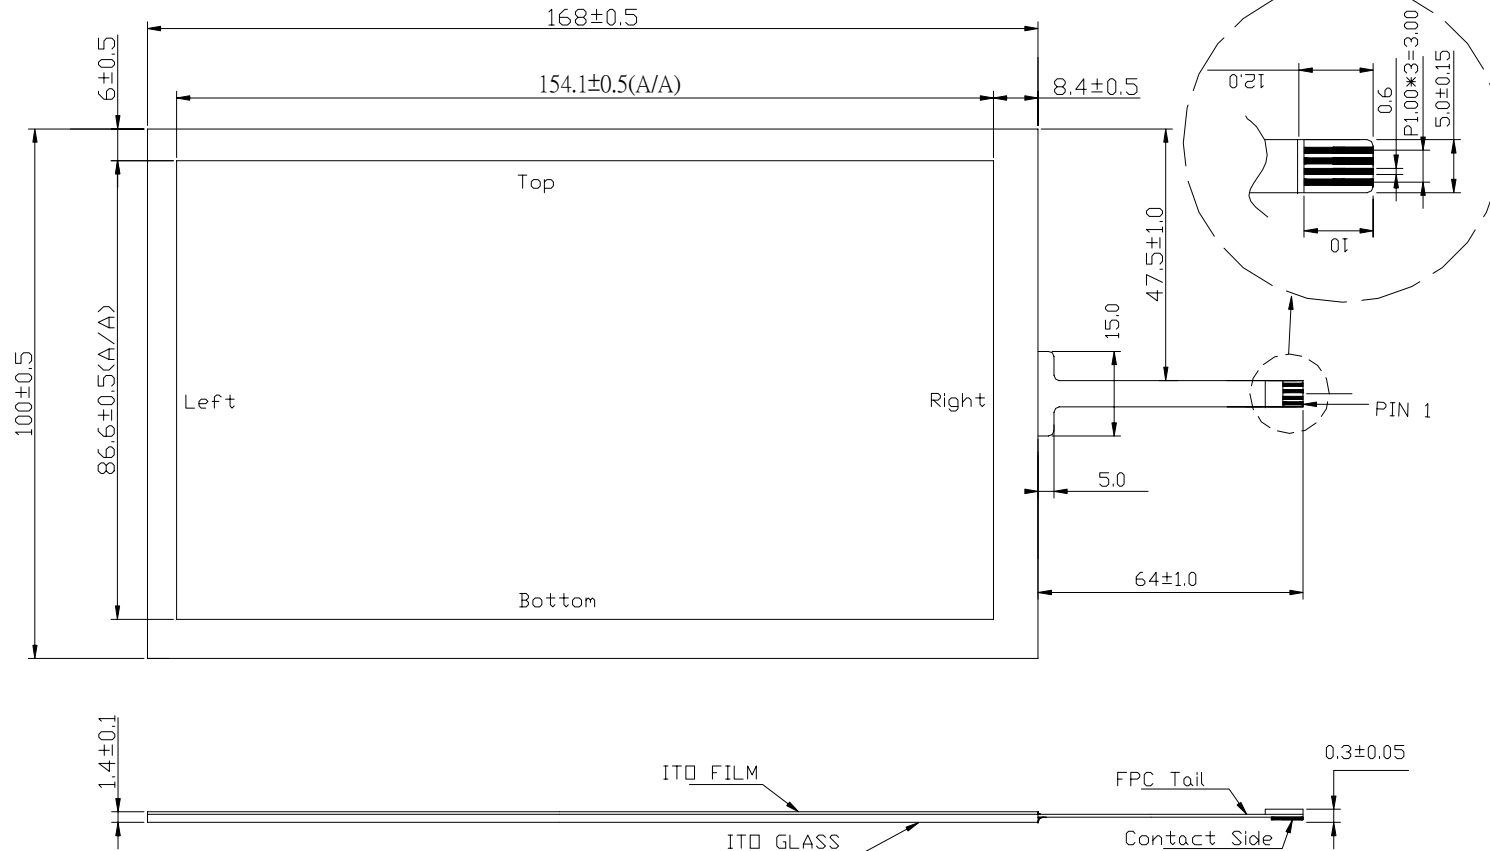

Note :

Pin 4 : Top

Pin 3 : Right

Pin 2 : Bottom

Pin 1 : Left

Pin Pitch : 1.0 mm

ITO Glass : 1.1 mm

Total Thickness : 1.4 ±0.1 mm

Faceplate Surface : Anti-glare coating

A/A Inside Active Area

A/A Outside Non-Active Area

品名	SE-AC168100M	製圖	Jason	良英股份有限公司 SUPER ELITE TECHNOLOGY CO., LTD	單位 : mm 公差 : 如圖所示	發行日期:	06 - 14 - 2004
料號		確認	Cheng			變更日期:	11 - 03 - 2004

Automobile Touch Panel Specification

SET

Page

2

1. Suitability

This specification suit analog resistance touch panel, which used in LCD module.

2. Apply To Specification

2.1.Surface Hardness : 3H ↑

2.2. Optical Clarity : 78 ~ 84 %

2.3 Operating Temperature : -40°C ~ 80°C

2.4 Storage Temperature : -40°C ~ 85°C

2.5 Operating Voltage : DC5V

2.6 Operating Current : 5mA ~ 25mA

2.7 Isolation Resistance : 20MΩ ↑ @DC25V

2.8 Linearity : ±1.5% ↓

2.9 Operation Pressure : 25 ~ 50g

2.10 Endurance Test strikes : Over 1 million

2.11 Resistance : 150Ω ~ 1200Ω

2.12 Faceplate Surface : Anti-glare coating