


DWG No. 2K642701DV3

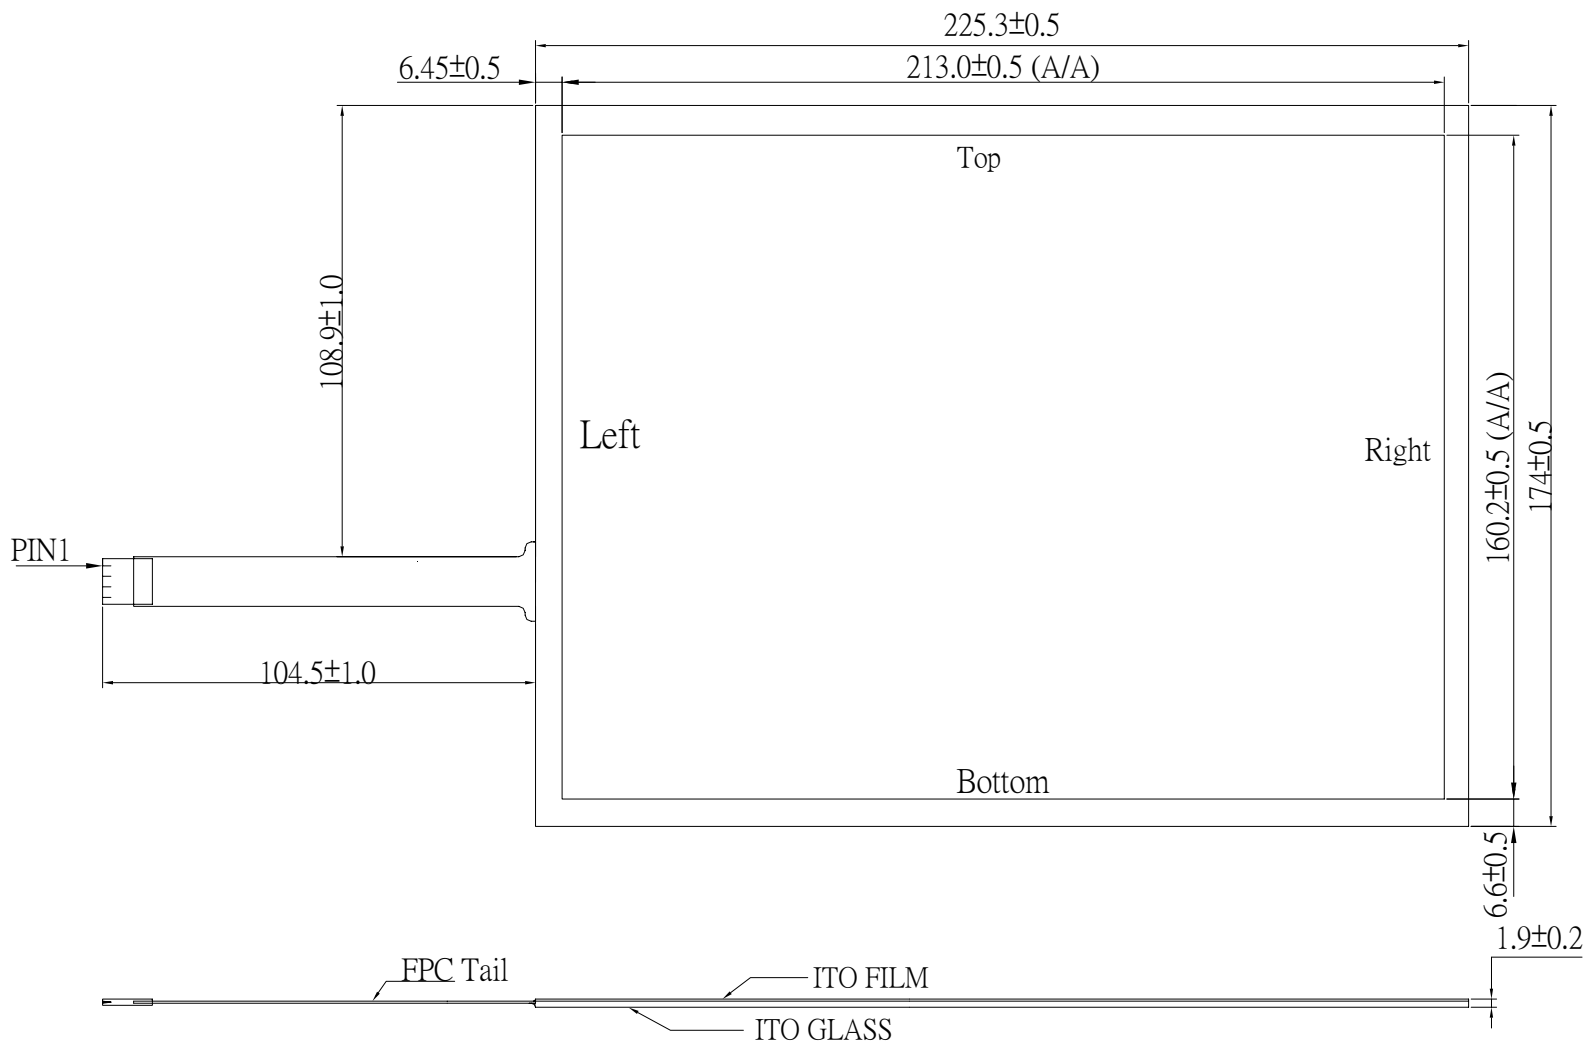

Note :

Pin 1 : Right

Pin 2 : Top

Pin 3 : Left

Pin 4 : Bottom

Pin Pitch : 2.54 mm

ITO Glass : 1.6 mm

Total Thickness : 1.9 ±0.2 mm

Faceplate Surface : Anti-glare coating

A/A Inside Active

A/A Outside Non-Active

品名	SE-AC225174M	製圖	Jason	良英股份有限公司 SUPER ELITE TECHNOLOGY CO., LTD	單位 : mm 公差 : 如圖所示	發行日期:	04 - 27 - 2006
		確認	Cheng			變更日期:	05 - 17 - 2006

Automobile Touch Panel Specification

SET

Page

2

1. Suitability

This specification suit analog resistance touch panel. which used in LCD module.

2. Apply To Specification

2.1.Surface Hardness : 3H ↑

2.2. Optical Clarity : 78 ~ 84 %

2.3 Operating Temperature : -40°C ~ 80°C

2.4 Storage Temperature : -40°C ~ 85°C

2.5 Operating Voltage : DC5V

2.6 Operating Current : 5mA ~ 25mA

2.7 Isolation Resistance : 20MΩ ↑ @DC25V

2.8 Linearity : ±1.5% ↓

2.9 Operation Pressure : 35 ~ 60g

2.10 Endurance Test strikes : Over 1 million

2.11 Resistance : 200Ω ~ 900Ω

2.12 Faceplate Surface : Anti-glare coating