


DWG No. 2K11018DV2

Unit : mm

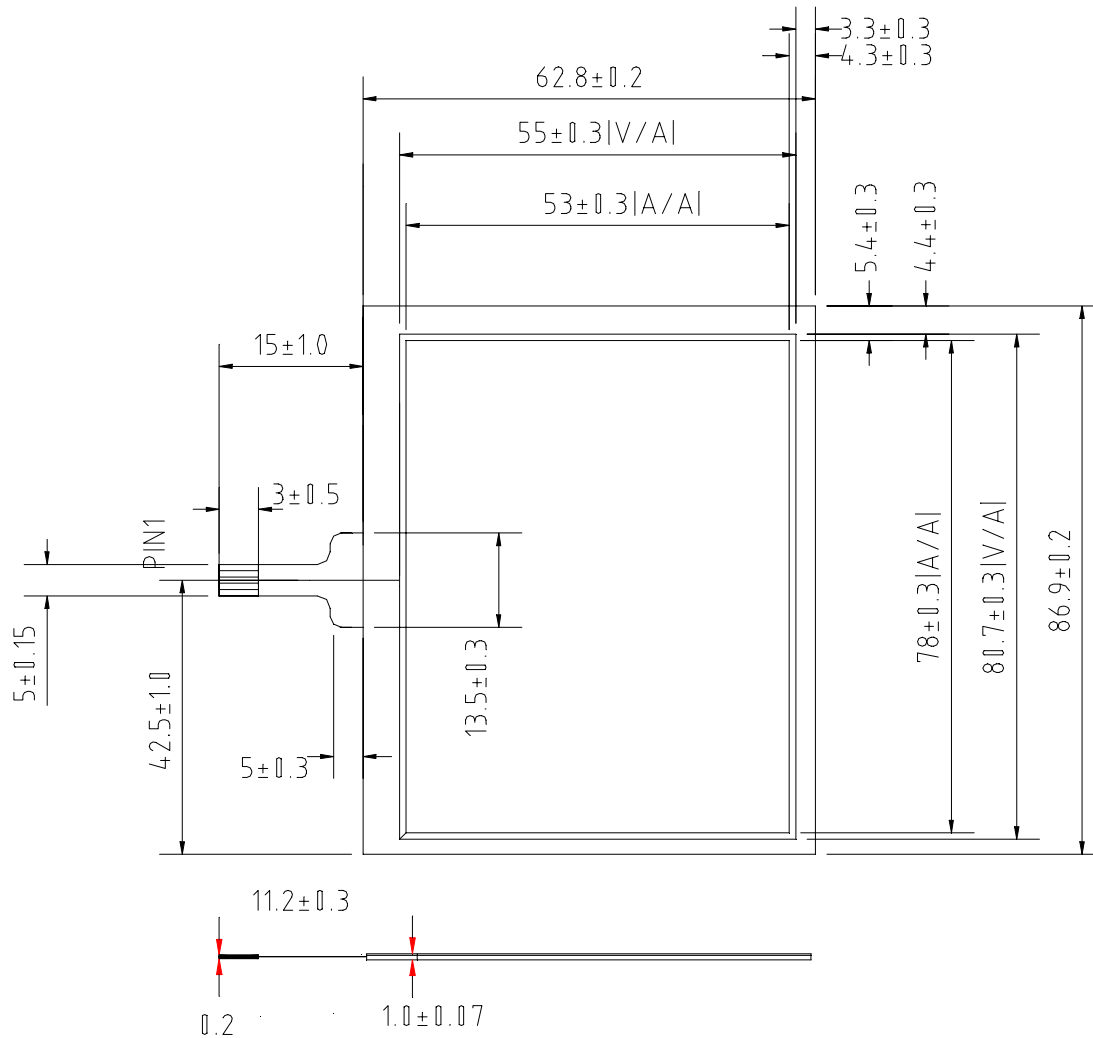

Note :

Pin 1 : Right

Pin 2 : Top

Pin 3 : Left

Pin 4 : Bottom

Pin Pitch : 1.0 mm

Glass : 0.7 mm

Total Thickness : 1.0 ±0.1mm

Surface Hardness : 3H

Optical Clarity : 80 %

Operating Temperature : 0°C ~ 50°C

Endurance Test : Over 1 million strikes

Operating Voltage : DC5V

Resistance : 200Ω ~ 900Ω

Linearity : < 1.5%

Faceplate Surface : glare coating

Operation Pressure : 25g~50g

Storage Temperature : -20°C ~ 70°C

Message Noise : 5 m sec ~ 15 m sec

Operating Current : 5mA ~ 25mA

Isolation Resistance : DC25V 20MΩ ↑

V/A : View Area

A/A : Active Area