


DWG No. 2K582201DV2

Unit : mm

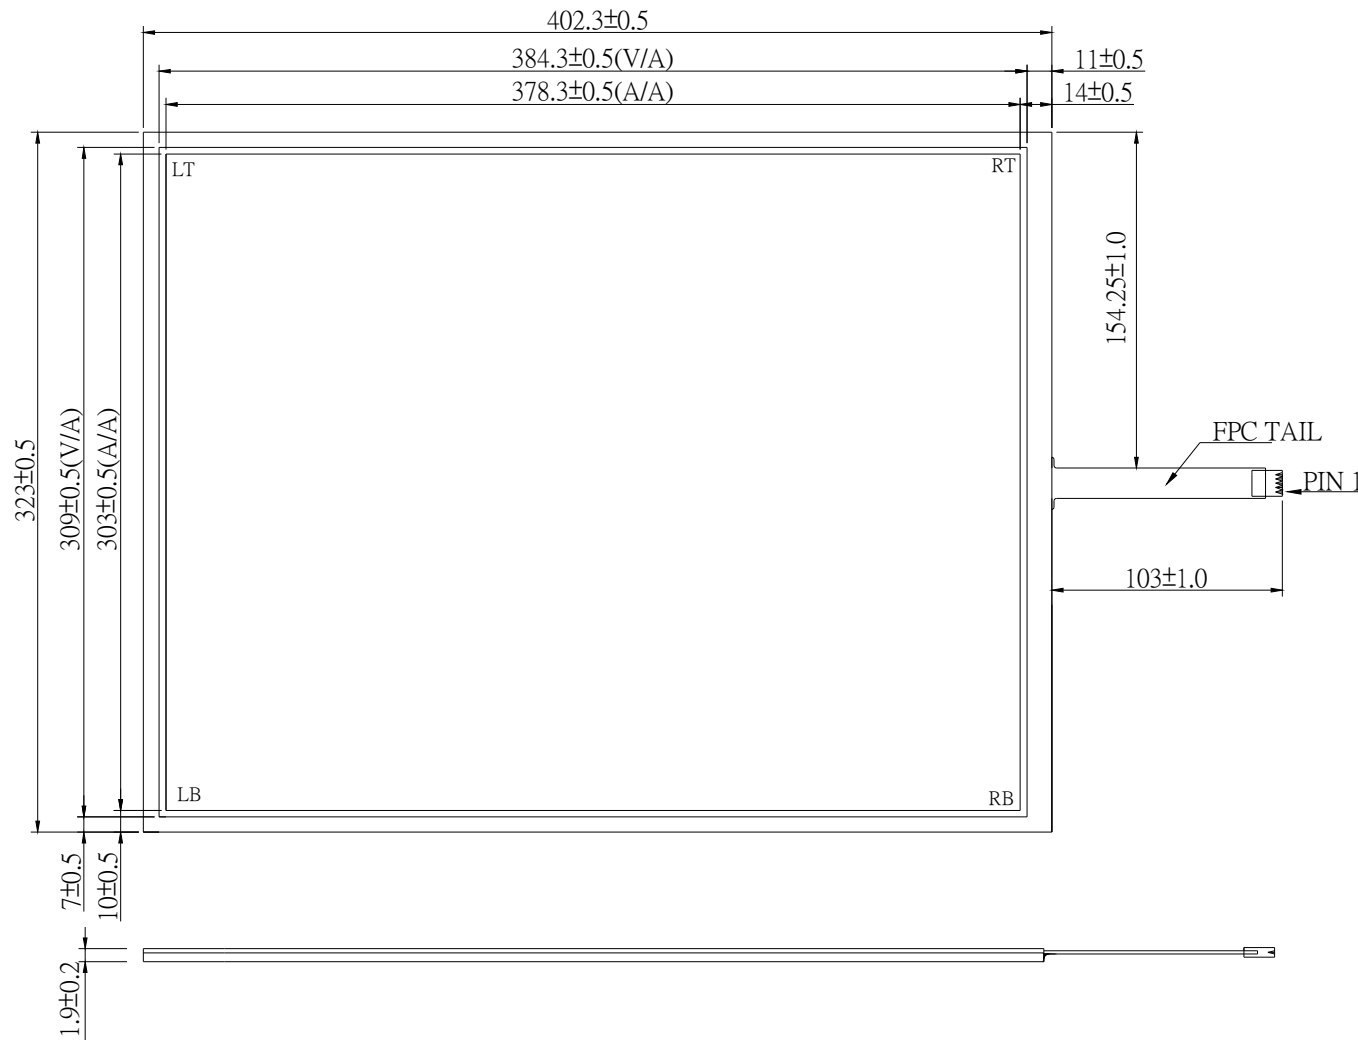

Note :

V/A : VIEW AERA

A/A : ACTIVE AERA

Pin 5 : LT

Pin 4 : RT

Pin 3 : AD-X

Pin 2 : RB

Pin 1 : LB

Pin Pitch : 2.54 mm

ITO Glass : 1.6 mm

Total Thickness : 1.9 ± 0.2 mm

V/A : VIEW AREA

A/A. : ACTIVE AREA

Model	SE-5W1911	Draw	劉湘明	良英股份有限公司 SUPER ELITE TECHNOLOGY CO., LTD	Unit : mm	DATE	08 - 22 - 2005
		check	陳智誠			cheng	

Touch Panel Specification

SET

Page

2/2

1. Suitability

This specification suit analog resistance touch panel. which used in LCD module.

2. Apply To Specification

2.1.Surface Hardness : 3H ↑

2.2. Optical Clarity : 76 ~ 84 % ↑

2.3 Operating Temperature : -10°C ~ 60°C

2.4 Storage Temperature: -20°C ~ 70°C

2.5 Operating Voltage : DC5V

2.6 Faceplate Surface : Anti-glare coating

2.7 Isolation Resistance : 20MΩ ↑ @DC25V

2.8 Linearity : ±1.5% ↓

2.9 Operation Pressure : 35 ~ 60g

2.10 Endurance Test strikes : Over 1 million

2.11 Resistance : 30Ω ~ 300Ω